


# Mark ECOFAN

**mark**<sup>®</sup>

- Ⓜ GB **Destrafcation-/ Exhaust fan**
- Ⓜ DE **Deckenluftverteiler/ Abluftventilator**
- Ⓜ FR **Destratificateur/ Extracteur**
- Ⓜ NL **Recirculatie-/ Afzuigventilator**



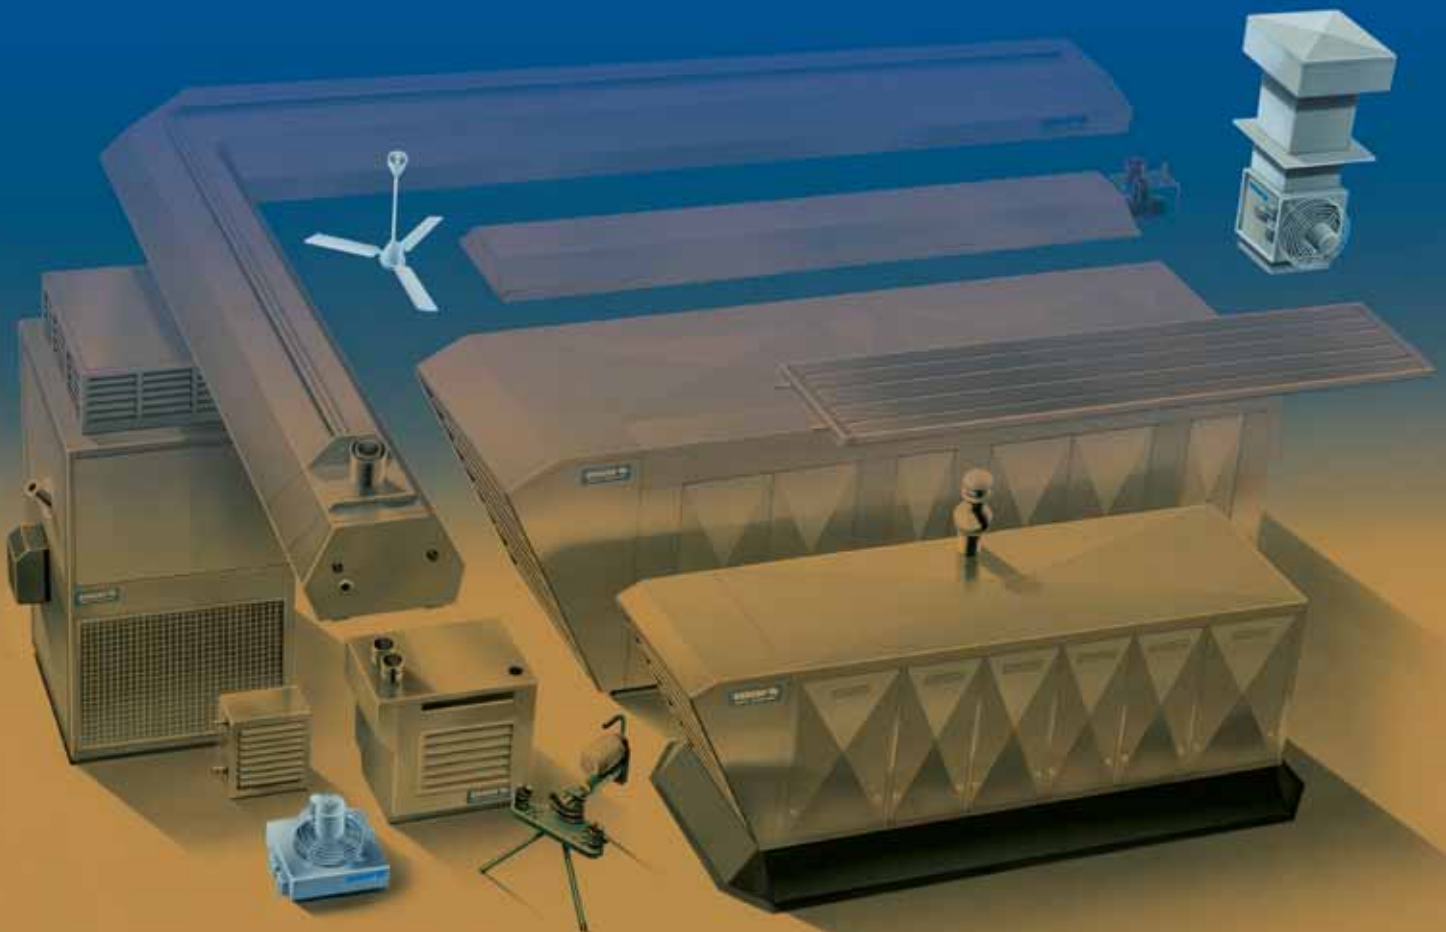

ECOFAN W42/W82/W142

## Mark ECOFAN

- (GB) MARK ECOFAN:  
FUNCTIONAL AND EFFECTIVE  
ENERGIE SAVING
- (DE) MARK ECOFAN:  
FUNKTIONNEL UND WIRKSAM  
ENERGIE FREUNDLICH
- (FR) MARK ECOFAN:  
FONCTIONNEL ET EFFICACE  
ECONOMIES D'ÉNERGIE
- (NL) MARK ECOFAN:  
FUNCTIONEEL EN DOELTREFFEND  
ENERGIE BESPAREND


# Mark ECOFAN W42 - W82 - W142




- (GB) DESTRATIFICATION UNIT:  
REDUCES HEATING COSTS
- (DE) DECKENLUFTVERTEILER:  
VERRINGERT DIE HEIZKOSTEN
- (FR) DESTRATIFICATEUR:  
REDUIT LES FRAIS DE CHAUFFAGE
- (NL) RECIRCULATIE-VENTILATOR;  
VERLAAGT DE STOOKKOSTEN

(GB)	(DE)	(FR)	(NL)
<b>Standard equipment:</b> Aluzinc housing Thermostat Downflow hood- 4-directions CE ISO 9001	<b>Standard Ausführung:</b> Alu-Zinkblech Gehäuse Thermostat Ausblasjalousie- 4-seitig CE ISO 9001	<b>Équipement standard:</b> Habillage en Alu-zinqué Thermostat Grille de pulsion- 4-directions CE ISO 9001	<b>Standaard uitrusting:</b> Aluzinc omkasting Thermostaat Uitblaasrooster- 4-zijdig CE ISO 9001
<b>Accessories:</b> Step transformer Suspension set Isolator switch	<b>Zubehör:</b> Drehzahlregler Aufhängesatz Reparaturschalter	<b>Accessoires:</b> Régulateur de vitesse Kit de suspension Régime moteur	<b>Accessoires:</b> Toerenregelaar Ophangset Werkschakelaar



t	a m <sup>3</sup> /h	b W/A	c min <sup>-1</sup>	d IP	e V	f dB(a)	g kg	h m
<b>W42</b>	4000	120/1.2	960	44	230	45	18	7
<b>W82</b>	8000	120/1.55	960	44	230	50	24	10
<b>W142</b>	14000	720/3.2	800	54	230	68	40	30

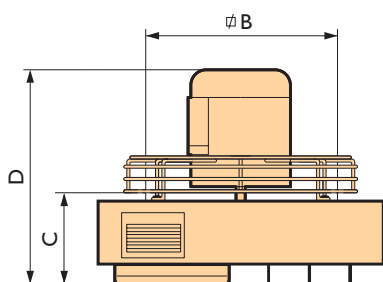

t	Type	Typ	Modèle	Type
a	Air displacement	Luftleistung	Débit d'air	Luchtverplaatsing
b	Motor rating	Stromaufnahme	Puissance absorbée	Opgenomen vermogen
c	Motor speed	Motordrehzahl	Régime moteur	Motortoerental
d	Protection	Schutzklasse	Protection	Beschermklasse
e	Voltage	Stromart	Tension	Stroomsoort
f	Noise level (5m)	Schallpegel (5m)	Niveau sonore (5m)	Geluidsniveau (5m)
g	Weight ECOFAN	Gewicht ECOFAN	Poids ECOFAN	Gewicht ECOFAN
h	Mounting height max.	Max. Montagehöhe	Hauteur max.	Max. montagehoogte

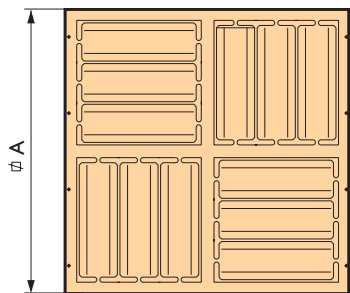

	Type W42	Type W82	Type W142
A	560	720	860
B	380	600	797
C	200	190	375
D	385	385	480



# Mark ECOFAN




- (GB) DESTRATIFICATION UNIT:  
REDUCES HEATING COSTS
- (DE) DECKENLUFTVERTEILER:  
VERRINGERT DIE HEIZKOSTEN
- (FR) DESTRATIFICATEUR:  
REDUCTION DES FRAIS DE CHAUFFAGE
- (NL) RECIRCULATIE-VENTILATOR;  
VERLAAGT DE STOOKKOSTEN

(GB)	(DE)	(FR)	(NL)
<b>Standard equipment:</b> Colour: white Aluminium fan Step transformer CE approved ISO 9001	<b>Standard Ausführung:</b> Farbe: weiß Aluminium Propeller Drehzahlregler CE geprüft ISO 9001	<b>Équipement standard:</b> Couleur: blanc Hélice d'aluminium Variateur de vitesse Marquage CE ISO 9001	<b>Standaard uitrusting:</b> Kleur: wit Aluminium waaier Toerenregelaar CE gekeurd ISO 9001

T	A	B	C	D	E	F	G
Type	Air displacement	Motor rating	Motor speed	ø Fan	Voltage	Height	Weight
Typ	Luftleistung	Stromaufnahme	Motordrehzahl	ø Propeller	Stromart	Höhe	Gewicht
Modèle	Débit d'air	Puissance absorbée	Rotation	ø Hélice	Tension	Hauteur	Poids
Type	Luchtverplaatsing	Oppgenomen vermogen	Motortoerental	ø Waaier	Stroomsoort	Hoogte	Gewicht

T	A	B	C	D	E	F	G
	m <sup>3</sup> /min	W	min-1	mm	V	mm	kg
<b>P 140</b>	300	95	290	1420	230	700	8

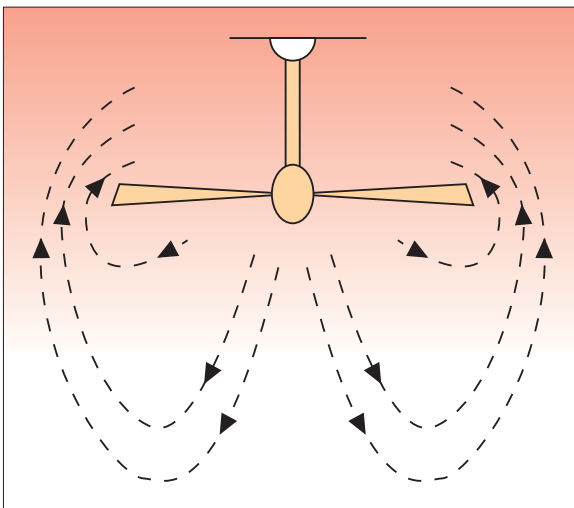

(GB)	<b>Number of fans</b>	Distance (m) between fan and floor 4-15	Number of fans per 1000 m <sup>2</sup> 12	Number of fans m <sup>2</sup> per fan 83
(DE)	<b>Stückzahl der Ventilatoren</b>	Montagehöhe (m) 4-15	Stückzahl Ventilator pro 1000 m <sup>2</sup> 12	Stückzahl m <sup>2</sup> pro Ventilator 83
(FR)	<b>Nombre de ventilateurs</b>	Distance (m) entre hélice et sol 4-15	Nombre de vent. par 1000 m <sup>2</sup> 12	Nombre de vent.m <sup>2</sup> par ventilator 83
(NL)	<b>Aantal ventilatoren</b>	Afstand in meters tussen waaier en vloer 4-15	Aantal ventilatoren per 1000 m <sup>2</sup> 12	Aantal m <sup>2</sup> per ventilator 83